SADDLEMEN®

WWW.SADDLEMEN.COM

USER GUIDE & INSTALLATION INSTRUCTIONS

DESCRIPTION: 2-Up Seats **PART NUMBERS:** 806-04- All variants
FITMENT: Harley-Davidson® Dyna® models 2006-2017

IMPORTANT:

Please read these instructions completely before starting installation. All "NOTE" "CAUTION" and "WARNING" notations are serious safety issues and should be read carefully. Possible injury to riders or damage to the motorcycle and/or accessory may result if improperly installed.

NOTICE TO DEALERS:

These instructions contain important information for future reference and should be given to the customer.


⚠ WARNING:

Because of the variety of motorcycle configurations, other accessories, and the features and intended use of this Saddlemen seat, there may be different mounting options. You are responsible for the proper installation of this seat on your motorcycle. Your attention to these installation instructions, any additional specific instructions and recommendations will permit the safe and proper use of this seat. You must mount this seat properly and securely before riding your motorcycle. If you lack the ability to safely and properly install this seat, seek out a qualified motorcycle technician for assistance. During installation, you may need to support the motorcycle with a suitable stand or lift so it will not tip over and injure you, or damage the vehicle. Using or mounting this seat improperly could result in a loss of control of the motorcycle which could result in damage to your motorcycle or other personal property, the property of third parties, and/or personal injury to yourself or others, up to and including death.

BE SURE TO THOROUGHLY READ AND CLOSELY FOLLOW THE MOUNTING INSTRUCTIONS THAT ARE INCLUDED WITH THIS SEAT.

- The seat must be installed and securely fastened onto the chassis of the motorcycle. Refer to your motorcycle's Owner's Manual and/or Service Manual for guidance.
- If you do not understand these instructions DO NOT mount the seat or remove any related components you may have already installed on your motorcycle.
- Thoroughly inspect your motorcycle's seat before every ride. Do not use this seat if its mounting system has been modified, has deteriorated, loosened or is beginning to fail.
- Continually check the security of your seat and other accessories at each stop as you ride. Items attached to your motorcycle can loosen during operation, so be sure to check them frequently.
- Do not use this seat if you have any doubts as to whether it is properly mounted to your motorcycle. You must be sure that the installation of the seat will not damage your motorcycle's painted or plated parts. Saddlemen is not responsible if you or your technician mount the seat and it damages your motorcycle for any reason.
- When using any accessory, do not exceed your vehicle's Maximum Gross Vehicle Weight as listed on your motorcycle or in the manufacturer's owner's manual.
- If your seat is ever damaged, do not use it until it has been inspected by your local professional motorcycle dealer. You may also need to send your seat to Saddlemen for inspection or repair. Replace any mounting part immediately if it has sustained damage that will prevent the seat from being properly secured to your motorcycle.

PASSENGER GRAB STRAP: This accessory seat is provided without a passenger grab strap. Carrying a passenger without a grab strap in place on your motorcycle may be hazardous for the passenger. Grab straps, rear mounted foot pegs, sissy bars, passenger backrests and trunks aid in making a passenger more secure on the vehicle. Laws in some jurisdictions require grab straps or other security devices when a passenger is transported. Do not transport a passenger if they are not secure. Do not disable grab straps or other safety features provided on your motorcycle and obey all traffic laws while riding.

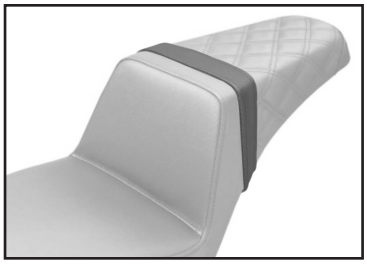

Saddlemen offers a complimentary grab strap for this seat, P/N 15327. Call (310) 638-1222 for more information. Always ride responsibly and take precautions to be sure your passenger is secure and comfortable.

⚠ California Proposition 65 Warning

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information: www.P65/Warnings.ca.gov

DO NOT ATTEMPT TO USE THIS SEAT IF:

- You do not understand these installation and use instructions;
- You do not understand any part of the seat's mounting system;
- You have any doubts as to the security of the seat's mounting system.
- If you have any concerns or questions, seek help at your qualified motorcycle dealer or call the Saddlemen support line at (310) 638-1222.

Remember: Motorcycling can be a dangerous activity. Installation of any accessory can increase your risk if it is not installed properly. You are responsible to install this seat or any accessory so it will not contact any portion of the drive train, suspension or steering, or if it will in any way interfere with the operation of your motorcycle.

11-400321 Dyna (Rev 2 04-2023)

INSTALLATION:

1. Your Dyna's seat is held on via a single screw located at the back of the seat, on the rear fender (A). Take off your original seat by removing the screw, and carefully sliding the seat up and away from the gas tank.

2. Your Saddlemen seat may have arrived with the rear bracket in the shipping position, requiring you to turn it around for installation on your bike (B). Using a 4mm Allen wrench, undo the two screws, flip the bracket around, and reinstall the two screws, with 10 -to- 15 ft/lbs of torque recommended. Do not overtighten.

3. Some Dyna models may come with Shock Bolt Covers (C) that need to be removed prior to installing your Saddlemen seat. They could interfere with - and potentially damage - your new seat. Test fit your new seat to check for interference. If your motorcycle does not have shock bolt covers, please skip ahead to step #5.


4. To remove the shock bolt covers, you'll need to put a stand under your bike's transmission (rear of the frame) to take the weight off the rear wheel. Then, remove each of the shock absorbers' top bolts - one at a time - and reinstall the bolt without the cover. Torque to 35 -to- 45 ft/lbs.


5. Install your new Saddlemen seat on the motorcycle by locating the metal tab at the front of the seat base (A), and sliding it forward under the gas tank, engaging it with the frame. At the rear, make sure to use the included protective washer between the metal seat tab and the bike's fender, and install the rear seat screw through the tab and into the fender. 10 -to- 15 ft/lbs of torque is recommended.

NOTE: Some 2006-later Dyna models used rubber bumpers glued to the rear fender. If they interfere with your new seat, they are easily removed by twisting them off.

6. Check to make sure the seat fits properly. The new seat will be firmer than the original seat and will break-in over time to provide greater comfort (usually several hundred miles of riding is required). During the break-in, the seat will also settle in, or lower, about ½ to one inch. Older seats may seem substantially lower because of the worn-out, compressed foam that may have deteriorated with time.

A protective rear tab fender washer is supplied with this seat. For additional paint protection, use a Saddlemen Adhesive Fender Washer (P/N 8901) and a Saddlemen Protective Tape Kit (PN: 4320-0807) which can further protect paint from abrasion damage from a seat, and is also useful when mounting other accessories such as tank bags or saddlebags. NOTE: It is not considered abnormal for your new Saddlemen seat to touch the motorcycle's chassis in certain places (just like your original seat). Due to the natural variance of your vehicle and your new Saddlemen seat, you should always check to see if portions of the seat are touching painted or finished surfaces on your motorcycle. If the test fitting of your seat indicates an area where the seat is touching a sensitive surface, please consider using the Saddlemen Protective Tape Kit.

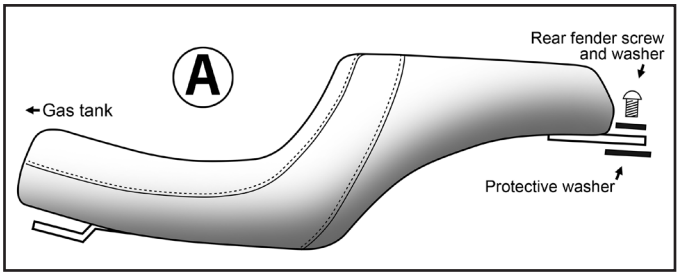

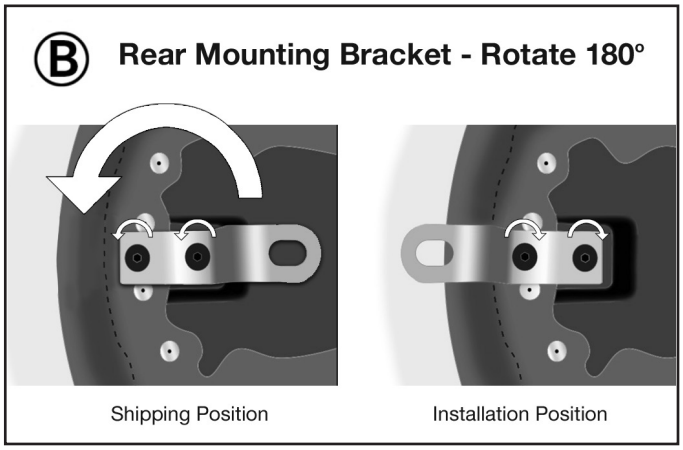



CAUTION:

It is your responsibility to make sure the seat installation does not create an unsafe or illegal situation. Remember that this seat is a custom accessory. You must check the installation to determine if it will be safe for you to operate the motorcycle and to properly and safely carry a passenger (this includes reinstalling the passenger grab strap or installing a suitable replacement). You must also ensure that the installation does not damage your vehicle in any way. After 50 miles (80 kilometers), recheck the seat's mounting to make sure it is still secure. Inspect all of your accessories and related hardware before and during each ride. An improperly mounted seat can interfere with the vehicle's operation and cause an unsafe riding condition.

LIMITED WARRANTY POLICY

SADDLEMEN LIMITED ONE-YEAR WARRANTY Saddlemen warrants its products for defects in materials, design or workmanship for a period of one year after retail purchase. Items that are defective will be repaired or replaced by Saddlemen at its sole discretion. Damage caused by improper use or improper installation is not a defect; therefore repair, replacement or shipping of a damaged accessory will not be covered under this warranty. This limited warranty contains other provisions and conditions, so please refer to the Warranty Policy that was provided with your seat or visit www.saddlemen.com for additional information. You can count on Saddlemen's quality, innovation, service and style. If for any reason you are not satisfied with the performance of your Saddlemen seat, please contact the Saddlemen support line at (310) 638-1222.

11-400321 Dyna (Rev 2 04-2023)